

TRIPLE 2-CHANNEL MULTIPLEXER

GENERAL DESCRIPTION


The NJU4053B is a triple 2-channel multiplexer with three independent control inputs and an inhibit input.

The three control input signals select 1 of a pair of channels to be turned on and connect them to the three outputs.

The operating voltage is as wide as 3 to 18V and the quiescent current is as low as 5 μ A max. (at $V_{DD}=5V$).


It is equivalent to RCA CD4053B and Motorola MC14053B.

PACKAGE OUTLINE

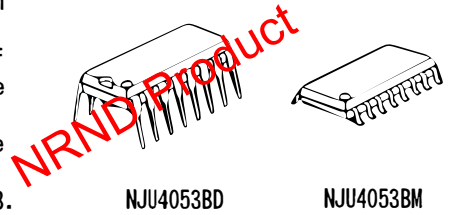

NJU4053BD

NJU4053BM




NJU4053B


FEATURES

- High ON/OFF Output Voltage Ratio
 - 65dB Typ. ($R_L=10k\Omega$)
- Low Quiescent Current
 - 5 μ A Typ. at $V_{DD}=5V$
- Low Crosstalk between channels
 - 80dB Typ.
- Wide Operating Voltage
 - 3 ~ 18V
- Linearity in the transfer characteristics.
 - $\Delta R_{ON} < 60\Omega$ ($V_{IN}=V_{DD} \sim V_{EE}$, $V_{DD}=15V$)
- Package Outline
 - DIP/DMP/SSOP 16
- C-MOS Technology


EQUIVALENT CIRCUIT

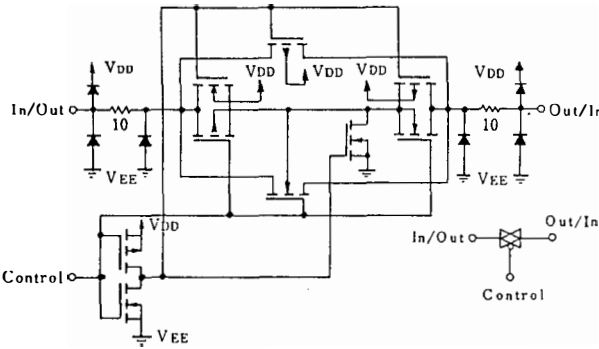

PIN CONFIGURATION



BLOCK DIAGRAM

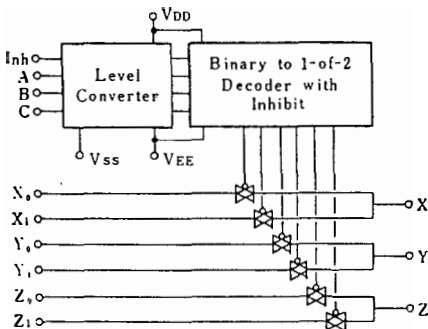

TRUTH TABLE

INH	C	B	A	On Switch		
0	0	0	0	Z_0	Y_0	X_0
0	0	0	1	Z_0	Y_0	X_1
0	0	1	0	Z_0	Y_1	X_0
0	0	1	1	Z_0	Y_1	X_1
0	1	0	0	Z_1	Y_0	X_0
0	1	0	1	Z_1	Y_0	X_1
0	1	1	0	Z_1	Y_1	X_0
0	1	1	1	Z_1	Y_1	X_1
1	x	x	x	None		

x: Don't Care

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V_{DD} - V_{EE}$	- 0.5 ~ + 20	V
Input Voltage(Control Signal)	V_{IN}	$V_{SS}-0.5 \sim V_{DD}+0.5$	V
Input Voltage(Analog Signal)	V_{SIG}	$V_{EE}-0.5 \sim V_{DD}+0.5$	V
Input Current	I_{IN}	± 10	mA
Output Current	I_{OUT}	± 10	mA
Power Dissipation	P_D	500 (DIP) 200 (DMP) 300 (SSOP)	mW
Operating Temperature Range	T_{opr}	- 40 ~ + 85	°C
Storage Temperature Range	T_{stg}	- 65 ~ + 150	°C

■ ELECTRICAL CHARACTERISTICS

• DC Characteristics

($V_{SS}=0V$)

PARAMETER	SYMBOL	CONDITIONS	V_{DD} (V)	Ta=-40°C		Ta=25°C			Ta=85°C		UNIT
				MIN	MAX	MIN	TYP	MAX	MIN	MAX	
Quiescent Current	I_{DD}	No signal Per Package	5 10 15 20		5 10 20 100		5 10 20 100		150 300 600 3000	μA	
On-State Resistance	R_{ON}	$0 \leq V_{is} \leq V_{DD}$ $V_{EE}=V_{SS}=0V$	5 10 15		500 210 140		220 100 60	600 250 160	800 300 200	Ω	
On-State Resistance Deviation	ΔR_{ON}	Between 2 channels $V_{EE}=V_{SS}=0V$	5 10 15				15 10 5			Ω	
Off-Channel Leakage Current		Each channel $V_{EE}=V_{SS}=0V$	18		±1000		±10 ±100		±1000	nA	
Input Capacitance	C_{IN}	$V_{IN}=0V$ Control Inhibit Switch					5.0 10	7.5		pF	
Low Level Input Voltage	V_{IL}	$R_L=10k\Omega$ $SW=V_{DD}$ $V_{EE}=V_{SS}$	$V_o=1.0V$ $V_o=1.0V$ $V_o=1.5V$	5 10 15	1.5 3.0 4.0		1.5 3.0 4.0		1.5 3.0 4.0	V	
High Level Input Voltage	V_{IH}		$V_o=4.0V$ $V_o=9.0V$ $V_o=13.5V$	5 10 15	3.5 7.0 11.0		3.5 7.0 11.0		3.5 7.0 11.0	V	
Input Current	$\pm I_{IN}$		$V_{IN}=0$ or 18V	18		±0.1		±0.1		± 1	μA


■ SWITCHING CHARACTERISTICS

(Ta=25°C, CL=50pF)


PARAMETER		SYMBOL	CONDITIONS	V _{DD} (V)	MIN	TYP	MAX	UNIT
Propagation Delay Time	SW Input to Output	t _{PLH}	R _L =10kΩ	5	15	45	ns	
		t _{PHL}		10	8	30		
	CONT Input to Output	t _{PHL}		15	5	20		
		t _{PHL}		5	15	45		
		t _{PHL}		10	8	30		
		t _{PHL}		15	5	20		
Output Enable Time	t _{PHZ}	R _L =10kΩ	5	600	1400	ns		
			10	250	700			
	t _{PLZ}		15	200	500			
			5	600	1400			
Output Disable Time	t _{PLZ}	R _L =10kΩ	10	250	700	ns		
			15	200	500			
			5	600	1400			
Sine-Wave Distortion			R _L =10kΩ, f=1kHz, V _{IS} =5V _{P-P}	10	0.05		%	
Feedthrough (all-ch. off)			R _L =1kΩ, 20log ₁₀ V _{OS} /V _{IS} =-50dB	10	4.5		MHz	
Crosstalk	SW A to B		R _L =1kΩ, V _{IS} =1/2(V _{DD} -V _{SS}) _{P-P}	10	3.0		MHz	
	Control-Out		R _I =1kΩ, R _L =10kΩ, tr=tf=20ns CONTROL/INHIBIT	10	30		mV	

MEASUREMENT CIRCUITS



1. Noise Margin





2. Propagation Delay

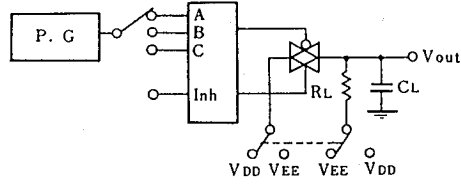


3. Feedthrough

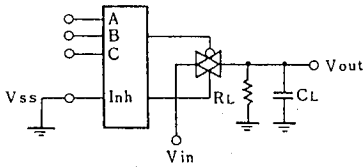

4. Crosstalk (Switch A and B)

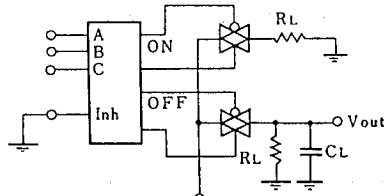

5. Crosstalk (Control and Out)



I N
he specificatio s o this databoo are o y
ie for i for atio , ithout a y uara tee
as re ards either ista es or o issio s he
applicatio circuits i this databoo are
described o y to sho represe tati e usa es
of the product a d ot i te ded for the
uara tee or per issio of a y ri ht i cudi
the i dustria ri hts