
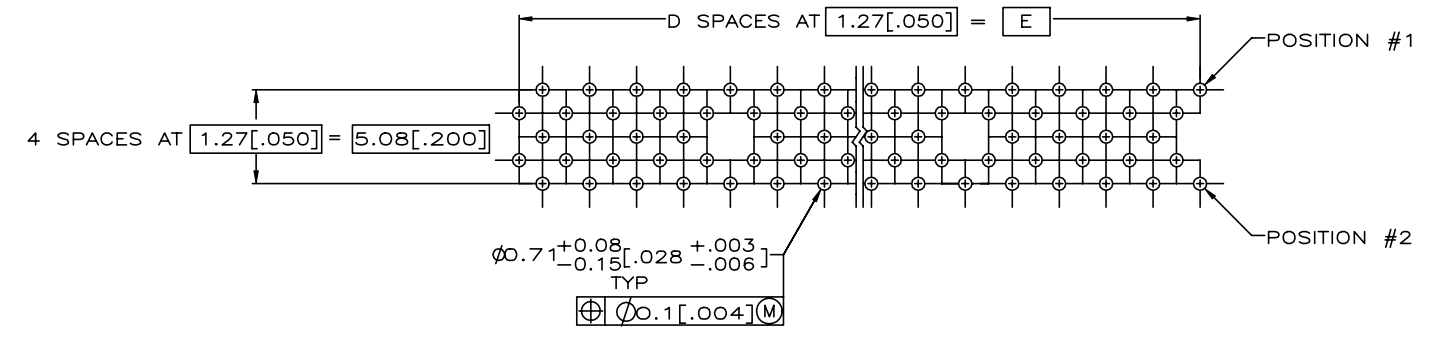
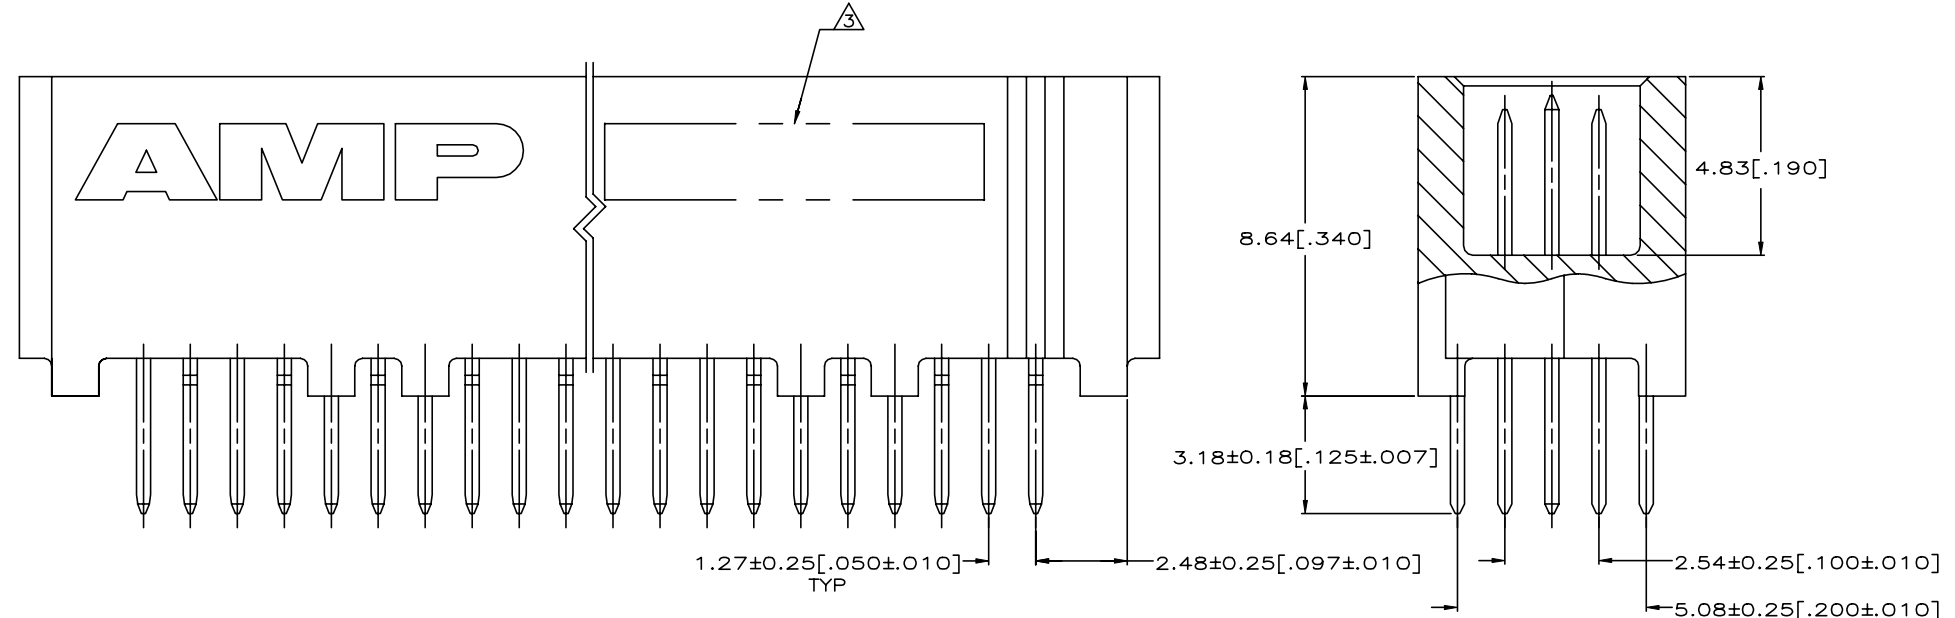


REVISIONS				
P	LTR	DESCRIPTION	DATE	APPD
A		REVISED PER ECO-20-011414	05JAN2021	AP SY

- △ HOUSING: HIGH TEMPERATURE THERMOPLASTIC, COLOR NATURAL.
PIN CONTACTS: PHOSPHOR BRONZE.
GROUND BUSES: PHOSPHOR BRONZE.
- △ CONTACTS & GROUND BUSES: 0.00076(.000030) MIN. GOLD PER ASTM B 488 ON CONTACT AREA, 0.00254-0.00762(.000100-.000300) MATTE TIN PER ASTM B 545 ON SOLDER TAIL, ALL OVER
0.00127-0.00254(.000050-.000100) MATTE NICKEL PER SAE AMS-QQ-N-290 ON ENTIRE CONTACT.
- △ DATE CODE MARKED IN AREA INDICATED.

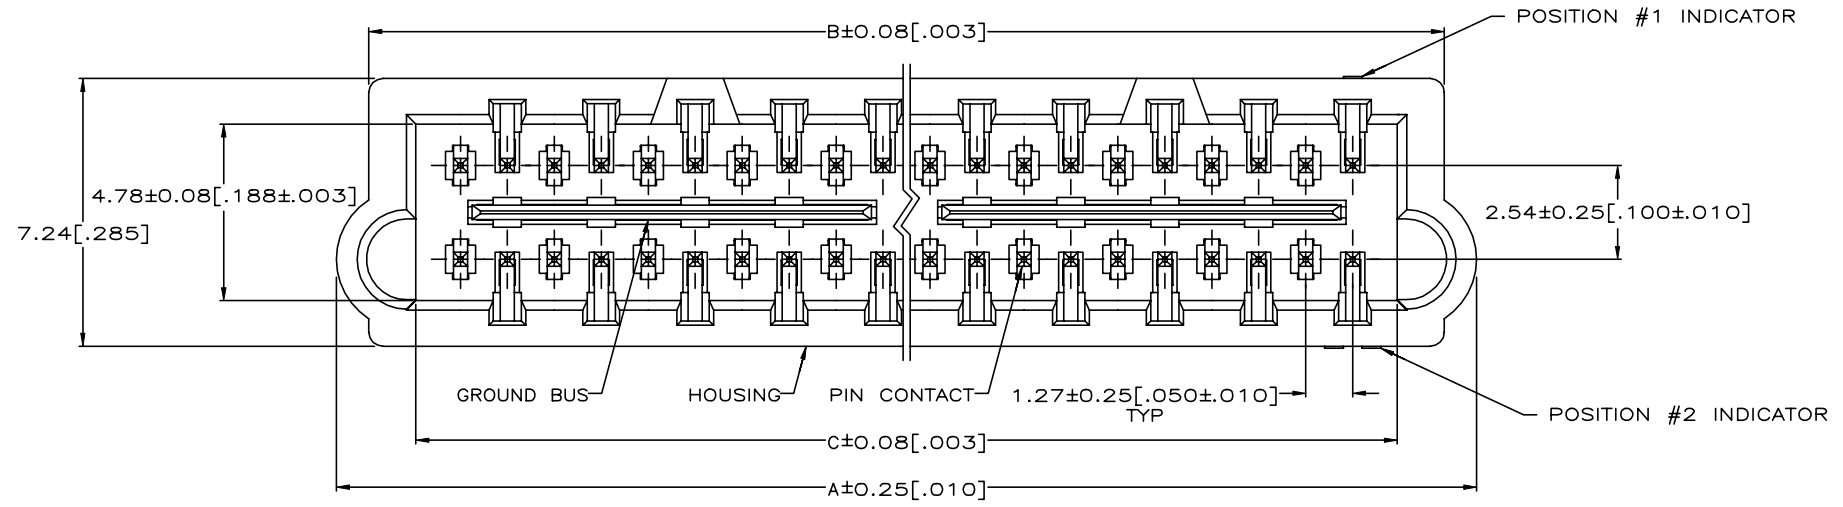

125.73[4.950]	99	128.22[5.048]	130.68[5.145]	132.44[5.214]	200	5536272-9
OBSOLETE 113.03[4.450]	89	115.52[4.548]	117.98[4.645]	119.74[4.714]	180	-5536272-8
OBSOLETE 100.33[3.950]	79	102.82[4.048]	105.28[4.145]	107.04[4.214]	160	-5536272-7
OBSOLETE 87.63[3.450]	69	90.12[3.548]	92.58[3.645]	94.34[3.714]	140	-5536272-6
OBSOLETE 74.93[2.950]	59	77.42[3.048]	79.88[3.145]	81.64[3.214]	120	-5536272-5
OBSOLETE 62.23[2.450]	49	64.72[2.548]	67.18[2.645]	68.94[2.714]	100	-5536272-4
OBSOLETE 49.53[1.950]	39	52.02[2.048]	54.48[2.145]	56.24[2.214]	80	-5536272-3
OBSOLETE 36.83[1.450]	29	39.32[1.548]	41.78[1.645]	43.54[1.714]	60	-5536272-2
OBSOLETE 24.13[.950]	19	26.62[1.048]	29.08[1.145]	30.84[1.214]	40	-5536272-1
E	D	C	B	A	NO OF POS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DATE	01-20-05
mm [INCHES]	0 PLC ± -	CHK	A. FERNANDEZ
1 PLC ± -	1 PLC ± -	APPD	D. DIXON
2 PLC ± -	2 PLC ± -	DATE	01-20-05
3 PLC ± 0.13 [.005]	3 PLC ± -	NAME	D. DIXON
4 PLC ± -	4 PLC ± -	PRODUCT SPEC	108-1272
ANGLES	± -	APPLICATION SPEC	114-11005
MATERIAL	FINISH	SIZE	A1
△	△	WEIGHT	0.000000
		CAGE CODE	00779
		DRAWING NO	5536272
		RESTRICTED TO	
		CUSTOMER DRAWING	

TE Connectivity
PLUG ASSEMBLY, 10.92[.430] STACK, 3.18[.125] TAIL, BOARD TO BOARD, MICRO-STRIP

SCALE 10:1 SHEET 1 OF 1 REV A